

**Notes:**

Frames: Timber to be retained and restored where required. New frames to match existing subject to a full survey of the existing windows.


Clear Glazing : Sealed double glazed, heat soak tested toughened safety glass to all lights. All glazing in and adjacent to doors on the ground floor should be laminated (outer pane) to a min. thickness of 6.4mm and securely fixed in accordance with the manufacturer's recommendations

Opaque panels: clear outer pane heat soak tested toughened safety glass, ceramic frit to inner pane. A1 Non-combustible insulation adhered to back of panel.

**Ironmongery:**


Concealed friction stays. Integral restrictor of each opening sash restricting initial opening to less than 100mm. Window cleaning hinges to each opening pane - Restrictor manually disengaged to permit window to fully open to allow safe cleaning of glass.

All Windows/Doors to ground floor to be designed as secure windows in accordance with Approved document Q par. 2.2 and 2.3 (Designed in accordance with PAS 24:2012 is one method of compliance).

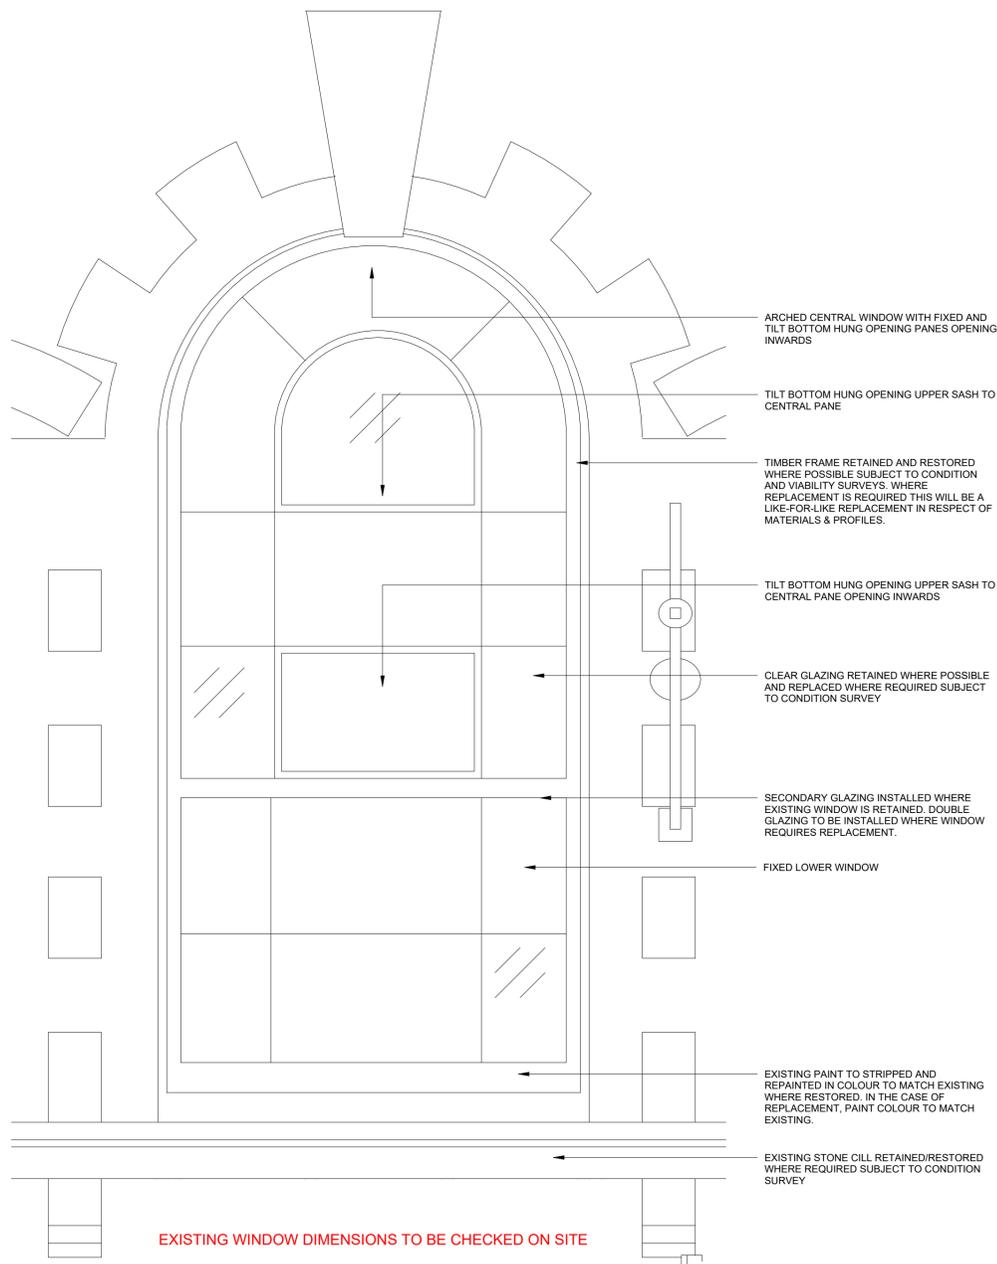

Window Type Schedule	
Window Type	Count
WT001	23
WT001_A	2
WT002	2
WT002_A	1
WT003	5
WT004	1
WT005	3
WT006	1
WT007	2
WT008	1
WT009	1
WT010	3
WT011	1
WT012	2
WT013	2
WT014	1
WT015	3
WT016	7
WT017	2
Grand total	63

**1 WT014 Elevation Detail**  
1 : 10

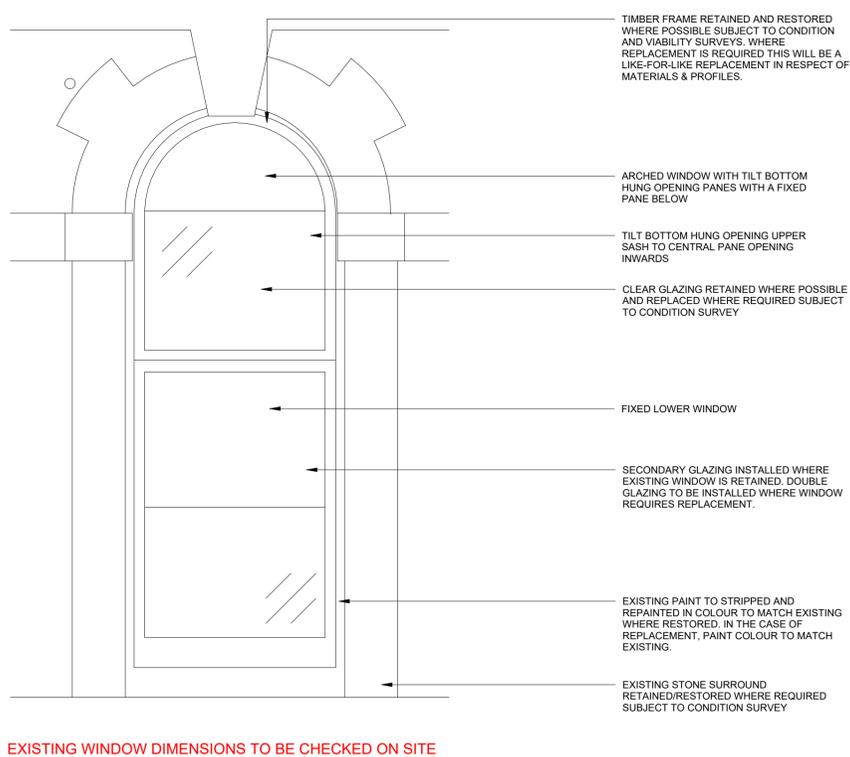

**2 WT015 Elevation Detail**  
1 : 10

A 03/07/25 Issue for Discharge of Planning Conditions AG JA

Rev Date Revision Details Dr Ch




**Bristol:** Westworks, Beacon Tower, Coleton Street, Bristol, BS1 4XE  
**Sussex:** 64 - 68 Brighton Road, Worthing, West Sussex, BN11 2EN  
 T 01903 248777 E sussex@ecearchitecture.com  
**London:** 76 Great Suffolk Street, London SE1 0BL  
 T 020 7928 2773 E london@ecearchitecture.com  
**WESTWORKS**  
 www.ecewestworks.com

Client's Name  
**CROSSMAN GROUP**

Job Title  
**CHRISTCHURCH HALL**

Drawing Title  
**WT014 & WT015 Elevation Details**



Drawn AG Checked JW Date 11/10/24

Job No	Origin	Vol	Level	Type	Role	Number	Status	Rev
W0802	WW	ZZ	ZZ	DR	A	5316	S2	A

Status

**PLANNING**